

PROCESS & TEMPERATURE CONTROLLER

MULTISPAN

PTC-1202A-M1



PV = Process value
SV = Set Value

TECHNICAL SPECIFICATION

INPUT SPECIFICATION:

Input Types	Input	Range
	J	0 to 600 °C
	K	0 to 1200 °C
	PT-100	-99 to 400 °C
	PT.1	-99.9 to 400.0 °C
	0-10V DC	-999 to 9999
	0-20mA DC	-999 to 9999
	4-20mA DC	-999 to 9999
Resolution	J,K,PT-100	= 1 °C
	PT.1	= 0.1 °C
Indication Accuracy	0-10V DC, 0-20mA DC, 4-20mA DC = 0.1, 0.01, 0.001, 0.0001	
	±1% of FSD ± 1 Count (FSD : full scale deflection)	

DISPLAY AND KEYS:

Display	Upper : 4 digit, 7 seg 0.8" RED LED Lower : 4 digit, 7 seg 0.56" Green LED
Keys	SET, INC, DEC, ENT

DIMENSION:

Size	96 (H) x 96 (W) x 54 (D) mm
Panel Cutout	92 (H) x 92 (W) mm

CONTROL METHOD:

Heating	1) PID control with Auto-Tuning 2) ON-OFF control
Cooling	1) BL.TP (Blower Time Proportion) 2) ON-OFF control
Alarm	High/Low/Inband/Outband/ Absolute Low/Absolute Outband

OUTPUT SPECIFICATION

Relay Output	
Relay	2 nos.
Relay Type	1 C/O (NO-C-NC)
Rating	5A, 230V AC/30 V DC
Analog Output	
4 to 20mA DC	
Transmitter supply	
24V DC	
Modbus Communication	
RS-485	


AUXILIARY SUPPLY

Supply voltage	100 to 270V AC, 50-60Hz
Power consumption (VA RATING)	Approx 7 VA @ 230V AC MAX


ENVIRONMENT CONDITION

Operating Temp.	0 °C to 55 °C
Relative Humidity	UP to 95% RH (non-condensing)
Protection Level	IP-65 (Front side) As per IS/IEC 60529 : 2001


MECHANICAL INSTALLATION

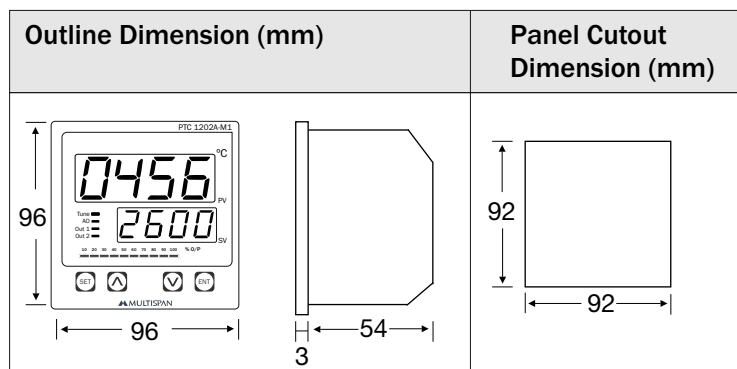

TERMINAL CONNECTION

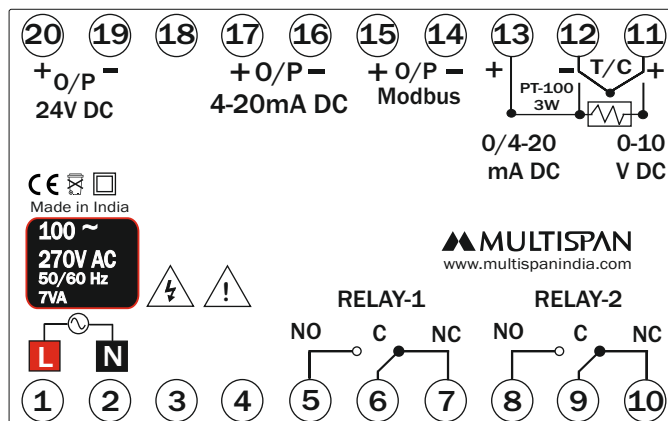

DISPLAY INDICATION

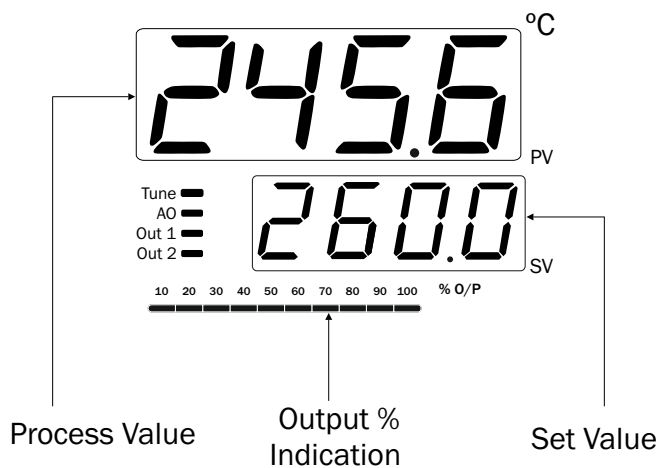

MECHANICAL INSTALLATION GUIDELINES

1. Prepare the panel cutout with proper dimensions as shown above.
2. Fit the unit into the panel with the help of clamp given.
3. The equipment in its installed state must not come in close proximity to any heating source, caustic vapors, oils steam, or other unwanted process byproducts.
4. Use the specified size of crimp terminal (M3.5 screws) to wire the terminal block. Tightening the screws on the terminal block using the tightening torque of the range of 1.2 N.m.
5. Do not connect anything to unused terminals.

MAINTENANCE

1. The equipment should be cleaned regularly to avoid blockage of ventilating parts.
2. Clean the equipment with a clean soft cloth. Do not use isopropyl alcohol or any other cleaning agent.
3. Fusible resistor must not be replaced by operator.

KEY OPERATION

FUNCTION	PRESS KEY
OPERATOR MODE	
To enter in parameter setting	Press for 5 sec
For start/stop PID auto tuning	Press 6 sec
To go in factory setting mode	+ Press 3 sec
To Reset soak process	Long Press
PARAMETER SETTING MODE	
To set parameter value	
To increment parameter value.	
To decrement parameter value.	
Set parameter to be save & exit.	

INSTALLATION GUIDELINES

1. This equipment, being built-in-type, normally becomes a part of main control panel and in such case the terminals do not remain accessible to the end user after installation and internal wiring.
2. Do not allow pieces of metal, wire clippings, or fine metallic fillings from installation to enter the product or else it may lead to a safety hazard that may in turn endanger life or cause electrical shock to the operator.
3. Circuit breaker or mains switch must be installed between power source and supply terminal to facilitate power 'ON' or 'OFF' function. However this mains switch or circuit breaker must be installed at convenient place normally accessible to the operator.
4. Use and store the instrument within the specified ambient temperature and humidity ranges as mentioned in this manual.

WARNING GUIDELINES

WARNING : Risk of electric shock.

1. To prevent the risk of electric shock, power supply to the equipment must be kept OFF while doing the wiring arrangement. Do not touch the terminals while power is being supplied.
2. To reduce electro magnetic interference, use wire with adequate rating and twists of the same of equal size shall be made with shortest connection.
3. Cable used for connection to power source, must have a cross section of 1mm or greater. These wires should have insulations capacity made of at least 1.5kV.
4. When extending the thermocouple lead wires, always use thermocouple compensation wires for wiring for the RTD type, use a wiring material with a small lead resistance (5Ω max per line) and no resistance differentials among three wires should be present.
5. A better anti-noise effect can be expected by using standard power supply cable for the instrument.



SAFETY PRECAUTION

All safety related codifications, symbols and instructions that appear in this operating manual or on the equipment must be strictly followed to ensure the safety of the operating personnel as well as the instrument.

If all the equipment is not handled in a manner specified by the manufacturer, it might impair the protection provided by the equipment.




Read complete instructions prior to installation and operation of the unit.



WARNING : Risk of electric shock.

FACTORY SETTING

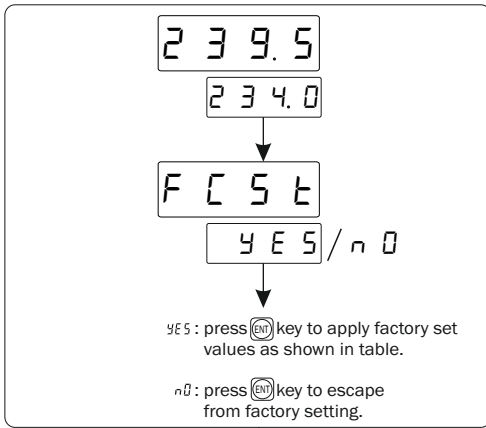

FACTORY SETTING

SR.	PARAMETER	VALUES
1	PB	20.0° C
2	IT	300
3	DT	75
4	CT	15 sec
5	MR	0° C
6	OFFSET	0° C
7	HYSTERISIS-1	3° C
8	HYSTERISIS-2	3° C
9	C-PB	4.0° C
10	C-ON	1 Sec
11	C-OFF	48 Sec
12	CRFC	0

PARAMETER MESSAGE DESCRIPTION

SET	Controlling O/P Set Point
SET1	Set Point 1 For O/P 1
SET2	Set Point 2 For O/P 2
LOW1	Low Set Point 1
HIGH1	High Set Point 1
LOW2	Low Set Point 2
HIGH2	High Set Point 2
PASS	Password
INPT	Input (Sensor)
SLL	Set Low Limit
SHL	Set High Limit
OFFS	Offset
Pb	Proportional Band For PID Action
It	Integral Time Constant
dT	Derivative Time Constant
Ct	Cycle Time For PID Action
nr	Manual Reset
C-Pb	Cooling PB
C-ON	Cooling On Time
C-OFF	Cooling Off Time
HYS1	Hysterisis 1

PARAMETER MESSAGE DESCRIPTION

HYS2	Hysterisis 2
OUT1	OutPut 1 Mode
SOAK	Soak Time Select
SOAKd	Soak Mode
SOAKt	Soak Unit
SOAKv	Soak Time Value
SOAKM	Soak Time Memory
SOAKe	Soak Time End
Ctrl1	Control Action 1
OUT2	Output 2 Mode
Ctrl2	Control Action 2
AL1	Alarm 1
AL2	Alarm 2
SET2d	Set 2 Mode
r1dL	Relay 1 Delay Time
r2dL	Relay 2 Delay Time
ALt	Alarm Time
PID	PID Action
ONOFF	ON-OFF Action
BLTP	Blower TP Action
HIGH	High Alarm
LOW	Low Alarm
Out-b	OutBand Alarm
Ab-L	Absolute Low Alarm
In-b	In Band Alarm
Ab-O	Absolute Out Band Alarm
SEC	Second
min	Minute
HOUr	Hour
HEAT	Heating Mode
COOL	Cooling Mode
ALrn	Alarming Mode
OFF	OFF Mode
YES	Yes
n0	No
SAVE	Save
Indi	Set 2 Individual to Set 1
Relt	Set 2 Reletive to Set 1
FACT	Factory Setting
AOUt	Analog Output
BASE	Basic Configuration
Pu	Retransmission O/P On PV
Su	Retransmission O/P On SV
4-20	Manual Selection Of 4-20 mA Analog O/P
PERC	Percentage wise Selection Of 4-20 mA Analog O/P (Manually)
CON	Controlling Output


PARAMETER MESSAGE DESCRIPTION

<i>LDP%</i>	Low percentage	<i>LDP%</i>	Low percentage	<i>nOnE</i>	None Parity
<i>Hi P%</i>	High percentage	<i>Hi P%</i>	High percentage	<i>EvEn</i>	Even Parity
<i>FrWd</i>	Forward	<i>FrWd</i>	Forward	<i>Odd</i>	Odd Parity
<i>rEur</i>	Reverse	<i>rEur</i>	Reverse	<i>Si nE</i>	Sign Integer
<i>Lr n%</i>	Low Range for analog input	<i>SrPS</i>	Soak Passing	<i>FLDt</i>	Float datatype
<i>hr n%</i>	High Range for analog input	<i>SrR%</i>	Soak Remaining	<i>cnE</i>	Controlling Output
<i>CrF%</i>	Correction Factor for analog input	<i>SrTn</i>	Soak Time Normal	<i>Aut</i>	Auto
<i>FLtr</i>	Filter Time	<i>Addr</i>	Address	<i>Addr</i>	Address
<i>SLL</i>	Signal Low Limit for 4-20mA input	<i>bAud</i>	Baudrate	<i>bAud</i>	Baudrate
<i>rLY1</i>	Relay 1 parameter setting	<i>Prty</i>	Parity	<i>Prty</i>	Parity
<i>rLY2</i>	Relay 2 parameter setting	<i>dAtA</i>	Datatype	<i>dAtA</i>	Datatype
<i>n.bUS</i>	Modbus Parameter setting	<i>Fr dL</i>	Frame Delay		


RANGE FOR CONTROL PARAMETER

Sr.	PARAMETER	RANGE FOR J,K,PT-100	RANGE FOR PT.1	RANGE FOR ANALOG INPUT	
1	PB	0.0 to 999.9 °C	0.0 to 999.9 °C		0.0 to 999.9
2	IT	0 to 9999	0 to 9999		0 to 9999
3	DT	0 to 9999	0 to 9999		0 to 9999
4	CT	4 to 99 sec	4 to 99 sec		4 to 99 sec
5	MR	-9 to 9 °C	-9.0 to 9.0 °C	DP 3	-0.099 to 0.099
				DP 2	-0.99 to 0.99
				DP 1	-9.9 to 9.9
				DP 0	-99 to 99
6	OFFSET	-20 to 20 °C	-20.0 to +20.0 °C	DP 3	-0.999 to 0.999
				DP 2	-9.99 to 9.99
				DP 1	-99.9 to 99.9
				DP 0	-999 to 999
7	HYS1	1 to 100 °C	0.1 to 100.0 °C	DP 3	0.001 to 0.999
				DP 2	0.01 to 9.99
				DP 1	0.1 to 99.9
				DP 0	1 to 999
8	HYS2	1 to 100 °C	0.1 to 100.0 °C	DP 3	0.001 to 0.999
				DP 2	0.01 to 9.99
				DP 1	0.1 to 99.9
				DP 0	1 to 999
9	C-PB	2.0 to 25.0 °C	2.0 to 25.0 °C		2.0 to 25.0
10	C-ON	1 to 20 sec	1 to 20 sec		1 to 20 sec
11	C-OF	5 to 200 sec	5 to 200 sec		5 to 200 sec
12	R1DL	0.00 to 99.59 mm.ss	0.0 to 99.59 mm.ss		0.00 to 99.59 mm.ss
13	R2DL	0.00 to 99.59 mm.ss	0.0 to 99.59 mm.ss		0.00 to 99.59 mm.ss
14	ALTM	0 to 99 sec	0 to 99 sec		0 to 99 sec
15	CRFC	-	-	DP 3	-0.999 to 0.999
				DP 2	-9.99 to 9.99
				DP 1	-99.9 to 99.9
				DP 0	-999 to 999
16	FLTR	-	-		0.1 to 10.0 Sec
17	SLL	-	-		0.0 to 5.0 mA

PARAMETER SETTING

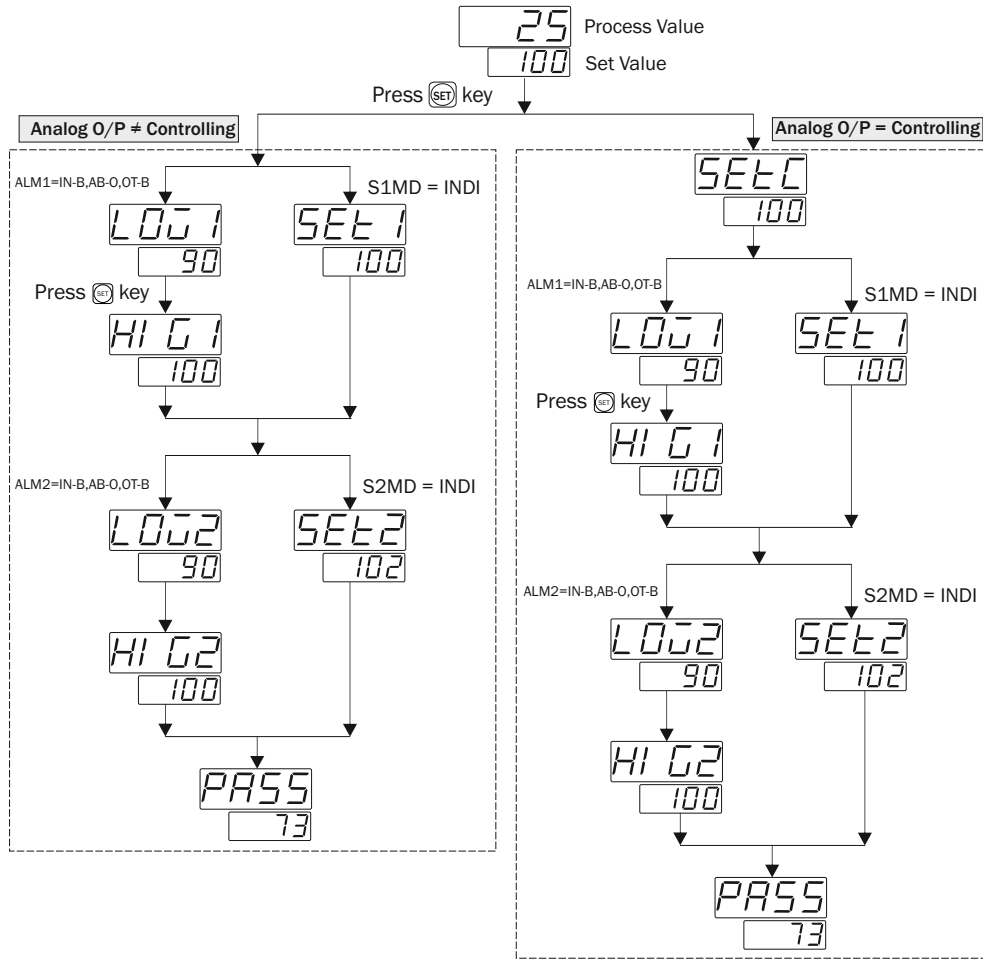


Password 73 Explanation

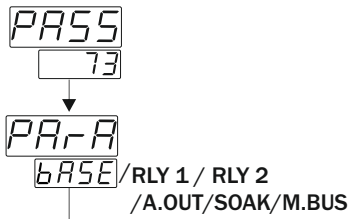


- Parameter 1 : Basic Configuration (bASE)**
- Parameter 2 : Relay 1 (rLY1)**
 - Case 1 : Heat
 - Case 2 : Cool
 - Case 3 : Alarm
 - Case 4 : Off
- Parameter 3 : Relay 2 (rLY2)**
 - Case 5 : Heat
 - Case 6 : Cool
 - Case 7 : Alarm
 - Case 8 : Off
- Parameter 4 : Analog Output (A.OUT)**
- Parameter 5 : Soak Timer (SOAK)**
- Parameter 6 : Modbus (mBUS)**

Note : In case 4 & 8 relay will be in off condition


Case 4 & 8 : OFF



To set Controlling Output Mode press (SET) + (V) key

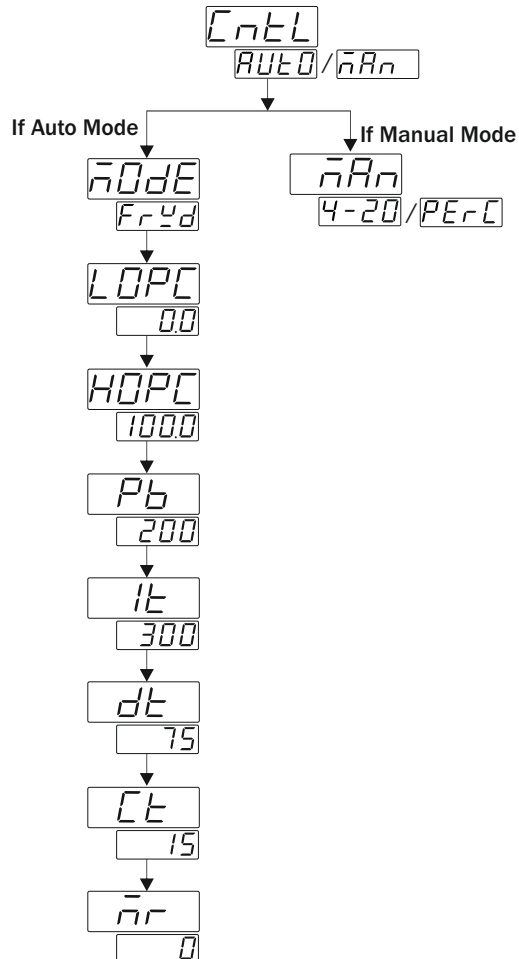


**Parameter 1 :
Basic Configuration
(bASE)**

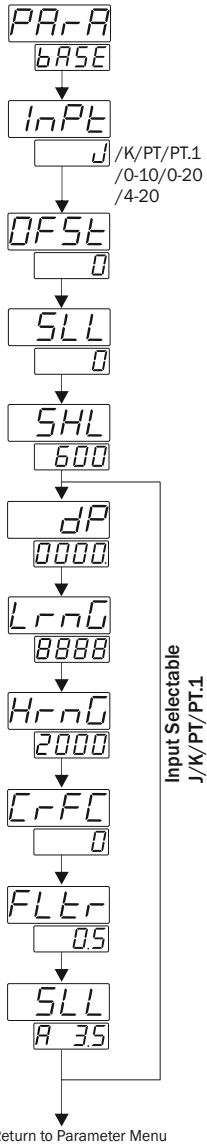


Input Selectable
J/K/PT/PT.1

**Parameter 2 :
Relay 1
(rLY1)**


Case 1 : Heat

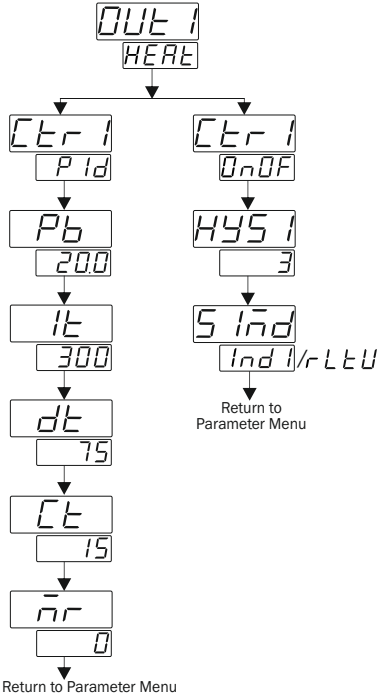

Case 2 : Cool

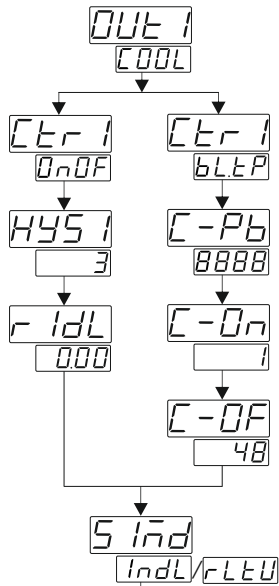


Case 3 : Alarm

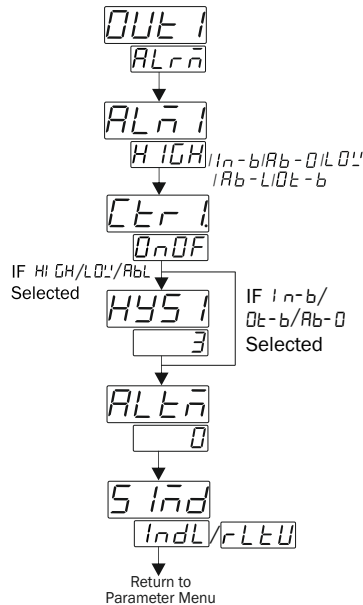


**Parameter 3 :
Relay 2
(rLY2)**


Case 5 : Heat

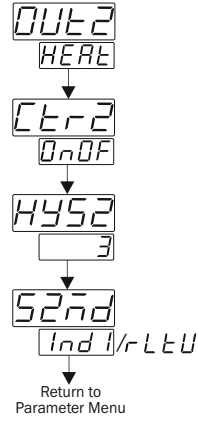


Case 6 : Cool

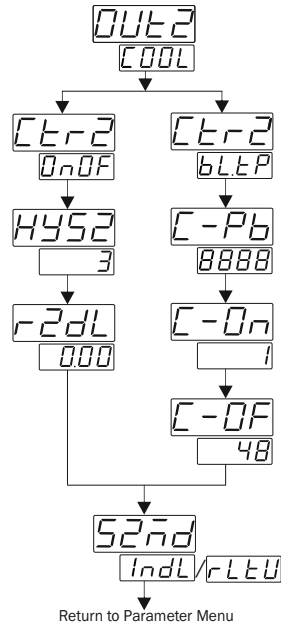

Case 7 : Alarm

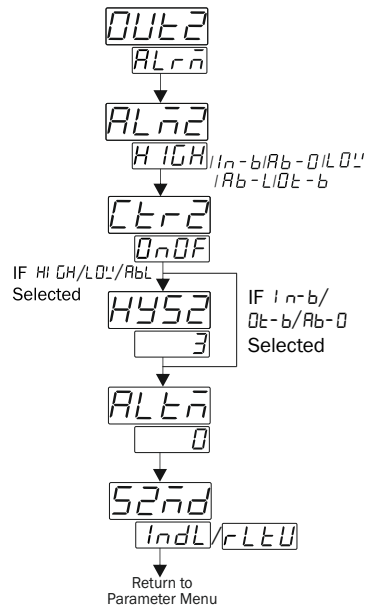


**Parameter 4 :
Analog Output
(AOUT)**

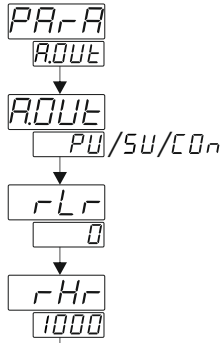


Return to Parameter Menu

**Parameter 5 :
Soak Timer
(SOAK)**

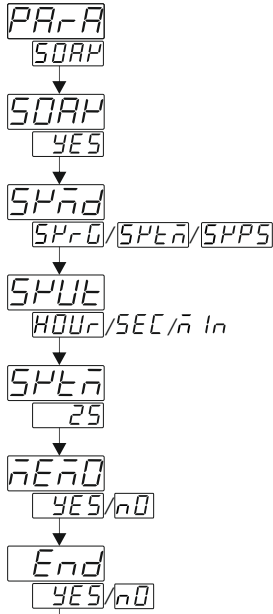

Return to Parameter Menu


**Parameter 6 :
Modbus Setting
(nBUS)**

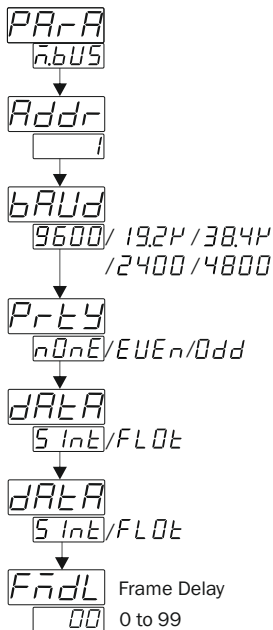


Return to Parameter Menu

CONTROL FUNCTION


HIGH ALARM:

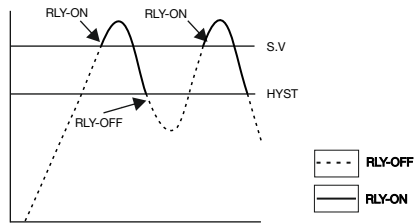


LOW ALARM:

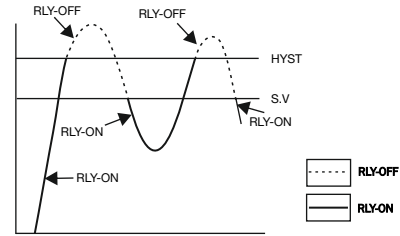

OUTBAND ALARM

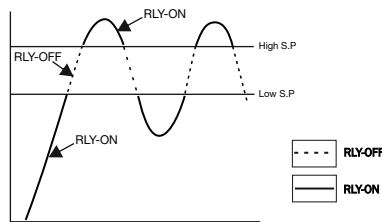


INBAND ALARM

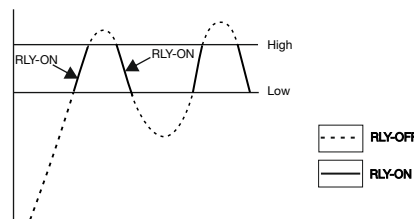


Low : 75
High : 125

ABSOLUTE OUTBAND ALARM

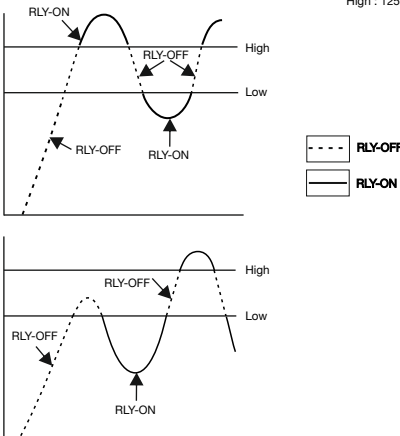

Low : 75
High : 125

ABSOLUTE LOW ALARM

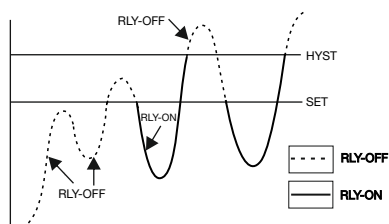

MODBUS

Slave Address :	1 to 127
Baudrate :	2400,4800,9600,38400bps
Parity :	None,Even,Odd
Datatype :	Sign integer, Float
Read Function Register :	0x03 and 0x04
Write Function Register :	0x06 and 0x10

Note :- When Parameter 32100 = no available

When Process Value 32101 = Initialization Value

When Process Value 32102 = Sensor Open

When Process Value 32103 = Sensor Reverse

When Process Value 32104 = Over Range

When Process Value 32105 = I/P Signal Lower then SLL

Sr.No	Access Type	Parameter	Register	
			Data Type	
			Integer	Float
1	R	Process Value	0	0
2	R	R1 Status	1	2
		Selection Value		
		On 1 Off 0		
3	R	R2 Status	2	4
		Selection Value		
		On 1 Off 0		
4	R	Control Percentage	3	6
5	R	Analog Output Value	4	8
6	R/W	C Set	5	10
7	R/W	Low Set1	6	12
8	R/W	High Set1	7	14
9	R/W	Set2	8	16
10	R/W	Low Set2	9	18
11	R/W	High Set2	10	20
12	R/W	Set3	11	22
13	R/W	Low 3	12	24
14	R/W	High 3	13	26
15	R/W	Input	14	28
		Selection Value		
		J 0 K 1 PT-100 2 PT.1 3		
16	R/W	Out1 Mode	15	30
		Selection Value		
		Heat 0 Cool 1 Alarm 2 Off Mode 3		
17	R/W	Control Action1	16	32
		Selection Value		
		Pid 0		
18	R/W	Alarm1	17	34
		Selection Value		
		End Alarm 0 Abs Low 1 High Alarm 2 In Band 3 Abs Out Band 4		
19	R/W	Hys1	18	36
20	R/W	Delay Time1	19	38
21	R/W	Alarm Time1	20	40
22	R/W	Out2 Mode	21	42
		Selection Value		
		Heat 0 Cool 1 Alarm 2 Off Mode 3		
23	R/W	Control Action2	22	44
		Selection Value		
		Pid 0 On-Off 1 Blower TP 2		
24	R/W	Hys2	24	48
25	R/W	Set2 Mode	27	54
		Selection Value		
		Individual 0 Relative 1		
26	R/W	Soak	35	70
27	R/W	Set Low Limit	43	86
28	R/W	Set High Limit	44	88
29	R/W	Offset	45	90

30	R/W	PB	52	104
31	R/W	IT	53	106
32	R/W	DT	54	108
33	R/W	CT	55	110
34	R/W	MR	56	112
35	R/W	Auto Tune	62	124
		Selection Value		
		No 0 Yes 1		
36	R/W	Address	63	126
37	R/W	Baudrate	64	128
		Selection Value		
		B 2400 0 B 4800 1 B 9600 2 B 19200 3 B 38400 4		
38	R/W	Parity	65	130
		Selection Value		
		None 0 Even 1 Odd 2		
39	R/W	Data Type	66	132
		Selection Value		
		Sign Integer 0 Float 1		
40	R/W	Analog Output Type	67	134
41	R/W	RT Low Range	68	136
42	R/W	RT High Range	69	138

Sr.No	Access Type	Parameter	Register	
			Data Type	
			Integer	Float
43	R/W	Control Mode	70	140
		Selection Value		
		Forward 1 Reverse 0		
44	R/W	Low Percentage	71	142
45	R/W	High Percentage	72	144
46	R/W	Frame Delay	82	164

Data type = Sign Integer show value as per following

Input	Actual Value	DP Selection
J,K,Pt	Value/1	Fix
Pt.1	Value/10	Fix
Where Parameter is 1,6-14,19,25,32,44-46,48,49,57,69,70		
0-10V DC	Value/1	0
0-20 mA DC	Value/10	1
4-20mA DC	Value/100	2
	Value/1000	3
Where Parameter is 5 ,20,26,33		
0-10V DC	Value/10	Fix
0-20 mA DC		
4-20mA DC		
Where Parameter is 4,51-53,72,73		
0-10V DC	Value/100	Fix
0-20 mA DC		
4-20mA DC		